

SAFETY OPERATING & MAINTENANCE INSTRUCTIONS

Ratcheting Cable Cutter

RCC-325



Certificate No. TW-HSPM-1237

ISO 9001:2000

ISO 14001:2004

WARRANTY

The KuDos® RCC-325, excluding the cutting blades, is warranted to be free of defects in materials and workmanship for a period of 90 days, except in the case of abuse or modification.

FEATURES AND BENEFITS


- Cuts up to 400MCM (200 sq.mm) hard drawn copper.
- Cuts up to 600MCM (325 sq.mm) soft copper, aluminum and multiple conductor cable.
- Simple, one-hand operation.
- Single speed ratchet mechanism.
- Quick release mechanism for removal of cable to completion of cut.
- Tool can be locked in closed position.
- Convenient for working in tight places and easy to store.

OPERATION

- 1) While using, unlock the steering wheel locking plate. Be sure that the locking plate is back in its home position for safely after use.
(See Figure 1)
- 2) Pull down on blade ratchet release plate (OPEN) to release blade from ratcheting mechanism.
- 3) Place cable to be cut against stationary blade and rotate movable blade until it is also against cable.
- 4) Squeeze handles continuously until cable is cut.
- 5) If cable need to be released before the cut is completed, pull blade ratchet plate (OPEN) and cable can easily be removed.

PREVENTIVE MAINTENANCE

The service life of a tool can be greatly improved with proper care and maintenance. To extend the life of your RCC-325 Ratcheting Cable Cutter, keep it clean and well lubricated every three months.



WARNING

Read and understand all of the instructions and safety information in this manual before operating or servicing of this tool. Other use of this tool may lead to serious personal injury or death.



DANGER

Tool are **NOT** insulated for use on near energized conductors. Use of these tools near energized conductors may lead to electrical shock, causing severe injury or death.

DO NOT use these tools near energized conductors without adequately insulating operator and surroundings

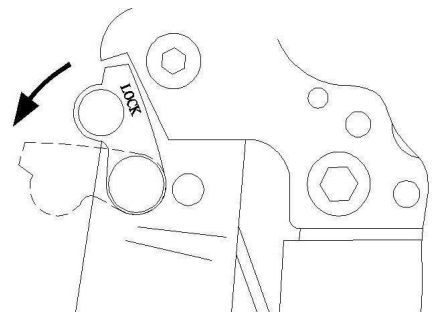


Figure 1

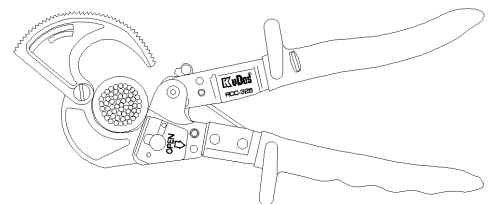


Figure 2



**NOT FOR USE ON ACSR CABLE
XLPE OR STEEL WIRE**