






针型(PIN) 1P

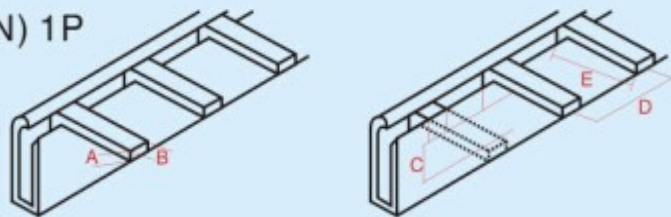


Specification	model	A	B	C	D	E	Cross-sectional area	Reference current
PIN	1P	1.4	4	7	17.8	11.5	9.8MM ²	63A
PIN	1P	1.5	4	7	17.8	11.5	13MM ²	80A
PIN	1P	1.7	4	9	17.8	11.5	15MM ²	100A

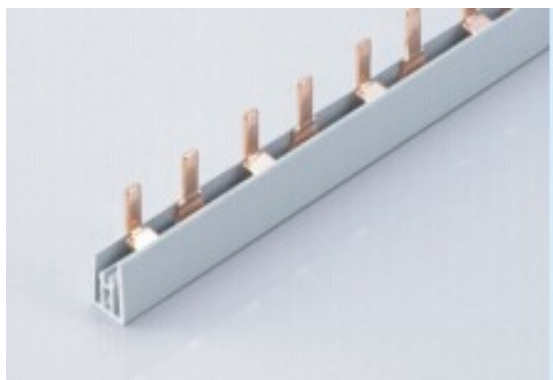


针型(PIN) 2P

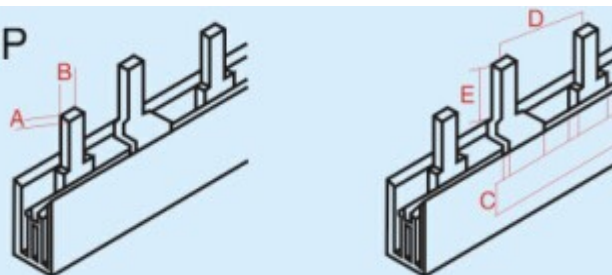



Specification	model	A	B	C	D	E	Cross-sectional area	Reference current
PIN	2P	1.4	4	7	17.8	11.5	9.8MM ²	63A
PIN	2P	1.5	4	7	17.8	11.5	13MM ²	80A
PIN	2P	1.7	4	9	17.8	11.5	15MM ²	100A

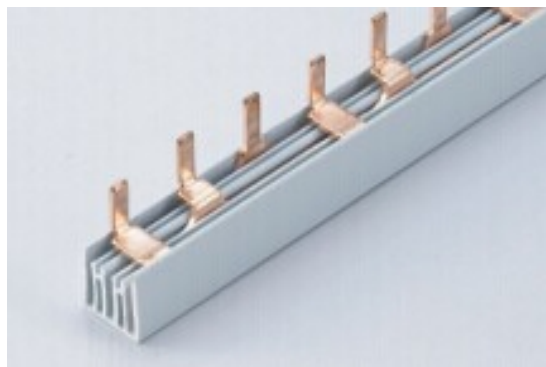

针型(PIN) 3P

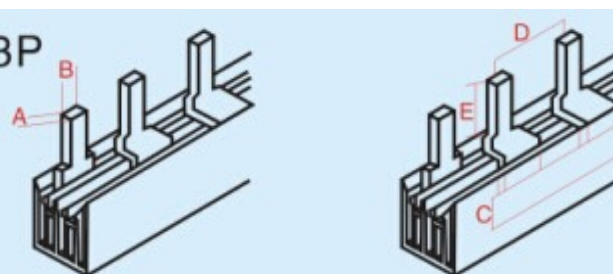

Specification	model	A	B	C	D	E	Cross-sectional area	Reference current
PIN	3P	1.4	4	7	17.8	11.5	9.8MM ²	63A
PIN	3P	1.5	4	7	17.8	11.5	13MM ²	80A
PIN	3P	1.7	4	9	17.8	11.5	15MM ²	100A

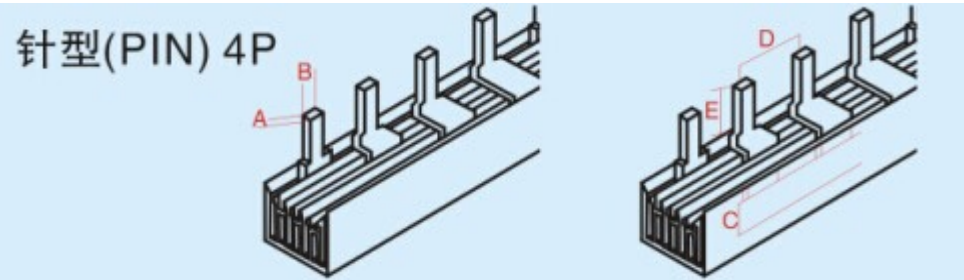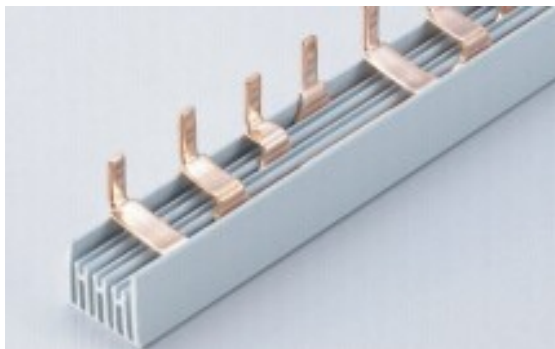

Specification	model	A	B	C	D	E	Cross-sectional area	Reference current
PIN	4P	1.4	4	7	17.8	11.5	9.8MM ²	63A
PIN	4P	1.5	4	7	17.8	11.5	13MM ²	80A
PIN	4P	1.7	4	9	17.8	11.5	15MM ²	100A