





**Size:** 172mmx150mmx50mm  
**Airflow:** 272~316m<sup>3</sup>/hr  
 160~178CFM  
**Weight:** 840g  
**Noise:** 54~59dBA  
**Impeller:** PBT Thermoplastic Black, UL94-VO  
**Frame:** Aluminum Alloy  
**Terminals:** 0.5mm  
**Lead Wire:** AWG#22 UL 1015(Optional)  
**Motor:** Shaded Pole Induction Motor  
**Operation Temperature:** -10°C~+70°C

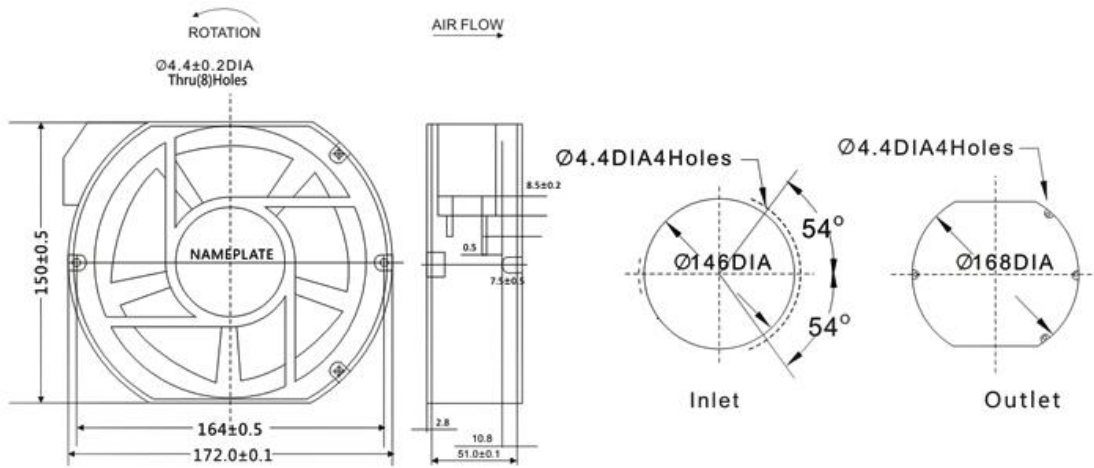

Model	Voltage VAC	Freq. Hz	Current: A	Power W	Speed RPM	Noise dBA	Air Flow		Phase	Capacitor
							M3/hr	CFM		
HB17050HA,B(S)	100~125	50/60	0.43/0.40	26/28	2650/2950	54/59	272/316	160/178	1	/
HB17050HA,B(S)	200~240	50/60	0.23/0.20	26/28	2650/2950	54/59	272/316	160/178	1	/
HB17050HA,B(S)	380	50/60	0.13/0.11	26/28	2650/2950	54/59	272/316	160/178	1	/

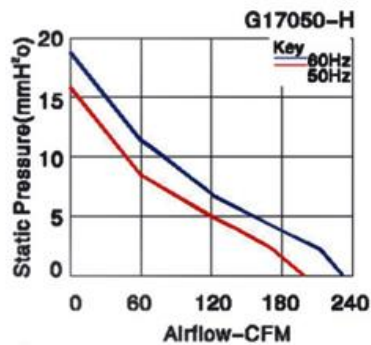

Key  
 60Hz  
 50Hz